

SULIT



**BAHAGIAN PEPERIKSAAN DAN PENILAIAN
JABATAN PENDIDIKAN POLITEKNIK DAN KOLEJ KOMUNITI
KEMENTERIAN PENDIDIKAN MALAYSIA**

JABATAN KEJURUTERAAN AWAM

PEPERIKSAAN AKHIR

SESI JUN 2018

DCC3103: GEOTECHNICAL ENGINEERING

TARIKH : 30 OKTOBER 2018

MASA : 8.30 PAGI - 10.30 PAGI (2 JAM)

Kertas ini mengandungi **DUA BELAS (12)** halaman bercetak.

Bahagian A: Struktur (2 soalan)

Bahagian B: Struktur (4 soalan)

Dokumen sokongan yang disertakan :

1. FORMULA
2. TAYLORS STABILITION CHART
3. SEMI LOG GRAPH
4. USCS TABLE
5. BEARING CAPACITY TABLE

JANGAN BUKA KERTAS SOALAN INI SEHINGGA DIARAHKAN

(CLO yang tertera hanya sebagai rujukan)

SULIT

SECTION A : 50 MARKS

BAHAGIAN A : 50 MARKAH

INSTRUCTION:

This section consists of TWO (2) structured questions. Answer ALL questions.

ARAHAN :

Bahagian ini mengandungi DUA (2) soalan berstruktur. Jawab SEMUA soalan.

QUESTION 1

SOALAN 1

- CLO1
C1 (a) List SIX (6) processes that are involved in a rock cycle.
Senaraikan ENAM (6) proses yang terlibat dalam kitaran batuan.

[6 marks]

[6 markah]

- CLO1
C2 (b) Explain briefly about organic soil, residual soil and transported soil.
Terangkan mengenai tanah organik, tanah baki dan tanah terangkut.

[9 marks]

[9 markah]

- CLO1
C3 (c) The result of Three Axial Flow Series Test for soil sample is shown in the Table 1(c) below. Calculate the value of soil cohesion, c and angle of friction, ϕ .

Keputusan Ujian Tiga Paksi Jadual 1(c) untuk sampel tanah adalah seperti jadual berikut. Kirakan nilai kejelekitan, c dan sudut geseran, ϕ untuk tanah tersebut.

[10 marks]

[10 markah]

Table 1(c) / Jadual 1 (c)

Sample Sampel	Minor normal Stress Tegasan Normal Minor σ_3 (kN/m ²)	Deviator Stress Sisihan Piawai $\sigma_1 - \sigma_3$ (kN/m ²)	Major Normal Stress Tegasan Normal Major σ_1 (kN/m ²)
A	20	150	170
B	80	160	240
C	245	195	440

QUESTION 2
SOALAN 2

CLO1
C2

- (a) Explain TWO (2) differences between a shallow and deep foundations.

Terangkan DUA (2) perbezaan antara asas cetek dan asas dalam.

[8 marks]

[8 markah]

CLO2
C3

- (b) Figure 2 (b) shows a cross section of a strip footing embedded in firm soil strata. The undrained cohesion value of the soil is 55KPa and the angle of friction is 10° . Calculate the Ultimate Bearing Capacity of the footing if the Dry Unit Weight of soil is 19 kN/m^3 and the Saturated Unit Weight of soil is 20 kN/m^3 . Ground water level (G.W.T) is at the base of the footing.

Rajah 2 (b) menunjukkan keratan rentas bagi asas jalur yang tertanam di dalam strata tanah. Nilai kejelekitan bagi tanah adalah 55KPa dan sudut geseran adalah 10° . Kirakan keupayaan galas muktamad untuk asas berkenaan sekiranya berat unit tanah kering bagi tanah adalah 19 kN/m^3 dan berat unit tanah tepu adalah 20 kN/m^3 . Paras air bumi (G.W.T.) berada di dasar asas.

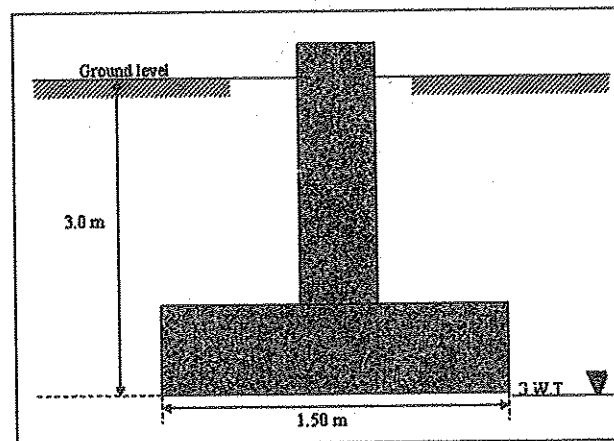


Figure 2(b) / Rajah 2 (b)

[9 marks]

[9 markah]

CLO2
C4

- (c) A strip footing is shown in Figure 2(c). Using Terzaghi's bearing capacity factors, calculate the gross allowable load per unit area (q_{all}) that the foundation can carry. Given:

Depth of foundation, $D_f = 1\text{ m}$

Breadth of foundation, $B = 1.2\text{ m}$

Factor of safety, $F_s = 3.0$

Unit weight of soil, $\gamma = 30\text{ kN/m}^3$

Cohesion of soil, $C = 50\text{ kN/m}^2$

Friction Angle $\phi = 20^\circ$

Satu asas rakit ditunjukkan dalam Rajah 2(c). Dengan menggunakan Faktor keupayaan gelas Terzaghi's, kirakan beban yang dibenarkan per unit luas (q_{all}) yang dapat ditanggung oleh asas. Di beri :

Kedalaman asas, $D_f = 1\text{ m}$

Lebar asas, $B = 1.2\text{ m}$

Faktor Keselamatan, $F_s = 3.0$

Berat unit tanah, $\gamma = 30\text{ kN/m}^3$

Kejelekitan, $C = 50\text{ kN/m}^2$

Sudut Geseran $\phi = 20^\circ$

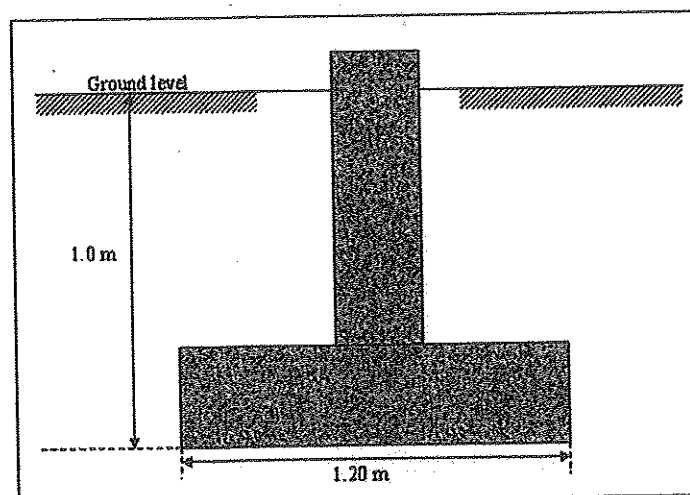


Figure 2(c) / Rajah 2(c)

[8 marks]

[8 markah]

SECTION B : 50 MARKS**BAHAGIAN B : 50 MARKAH****INSTRUCTION:**

This section consists of **FOUR (4)** structured questions. Answer **TWO (2)** questions only.

ARAHAN:

Bahagian ini mengandungi EMPAT (4) soalan berstruktur. Jawab DUA (2) soalan sahaja.

QUESTION 1**SOALAN 1**

(a) The results of a particle sieve analysis are shown in **Table 1(a)** below:

Hasil keputusan bagi analisis saiz zarah ditunjukkan dalam Jadual 1 (a) seperti di bawah :

Table 1(a) / Jadual 1(a)

Sieve size Saiz ayak (mm)	Mass retained Berat Tertahan (g)
63	0.0
37.5	26
19	28
13.2	18
9.5	20
6.7	49
4.75	50
2.36	137
1.18	46
0.6	31
0.212	34
0.075	30

The total mass was 469g. Draw the particle size distribution curve and calculate the coefficient of uniformity, coefficient of curvature and type of soil.

Jumlah jisim adalah 469g. Lukiskan lengkung agihan saiz zarah tanah dan tentukan pekali keseragaman, pekali kelengkungan dan jenis tanah.

[15 marks]

[15 markah]

CLO2
C4

- (b) The following are the results obtained from the standard compaction test.
Berikut adalah keputusan yang diperolehi daripada ujian pepadatan tanah.

Bulk Density <i>Ketumpatan pukal</i> (kg/m ³)	2060	2127	2154	2160	2142
Moisture content <i>Kandungan</i> <i>Lembapan</i> (%)	12	14	16	18	20

- i. Draw the curve of dry density against moisture content
Lukiskan lengkung ketumpatan kering melawan kandungan lembapan
- ii. Determine the maximum dry density and optimum moisture content of the soil.
Tentukan juga ketumpatan kering maksimum dan kandungan lembapan optimum.

[10 marks]

[10 markah]

CLO2
C3

QUESTION 2

SOALAN 2

- (a) A retaining wall has a height of 8m serves to hold the sand. Given the weight of sand and stress coefficients of each horizon is 26 kN/m^3 and 0.27, calculate :

Satu tembok penahan mempunyai ketinggian 8m berfungsi untuk menahan tanah pasir. Diberi berat unit tanah pasir dan pekali tegasan ufuknya masing-masing adalah 26 kN/m^3 dan 0.27, kirakan :

- i. Total thrust of sand on the wall

Jumlah tujahan tanah pasir ke atas tembok penahan.

[5 marks]
[5 markah]

- ii. Total thrust of sand on the wall, if there is groundwater at level 3m below from the surface sand. Given sand saturated unit weight is 30 kN/m^3 .

Jumlah tujahan tanah pasir ke atas tembok penahan sekiranya terdapat air bumi di paras 3m di bawah permukaan pasir. Diberi berat unit tepu tanah pasir ialah 30 kN/m^3 .

[10 marks]
[10 markah]

CLO2
C4

- (b) A retaining wall was built during the excavation as shown in Figure 2(b).
By ignoring the passive pressure in front of the retaining wall.

Sebuah tembok penahan dibina semasa kerja penggorekan dijalankan seperti dalam Rajah 2(b). Dengan mengabaikan tekanan pasif dihadapan tembok penahan tersebut;

- i. Draw the active side pressure acting on the rear wall.
Lukiskan tekanan sisi aktif yang bertindak di belakang tembok.

[2 marks]

[2markah]

- ii. Analyze the magnitude and location of the active thrust of soil behind the wall based on Rankine theory.

Analisis magnitud dan kedudukan tujah aktif tanah dibelakang tembok tersebut berdasarkan teori Rankine.

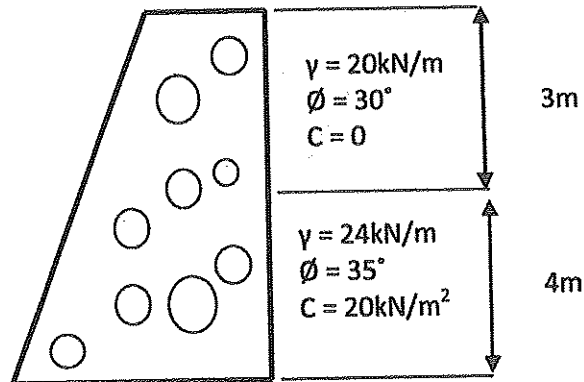


Figure 2(b) / Rajah 2(b)

[8 marks]
[8 markah]

Table 3 (b)/Jadual 3(b)

Slices	α°	Height, Z(m)	Width, b(m)
1	-10	0.95	2.3
2	4	2.44	2.5
3	20	3.32	2.5
4	35	3.51	2.5
5	57	1.74	2.4

[10 marks]
[10 markah]

QUESTION 4

SOALAN 4

CLO2
C3

- (a) Sketch the flow net for the seepage under or through the dam containing equipotential lines, N_e and flow lines, N_f .

Lakarkan carta aliran bagi resipan yang melalui atau di bawah empangan yang mengandungi garisan sama upaya, N_e dan garisan aliran, N_f .

(i)

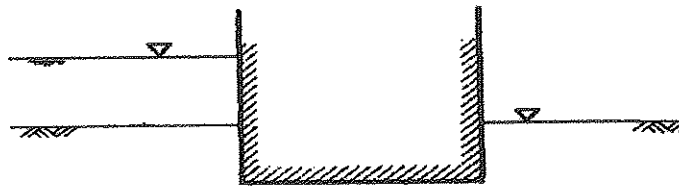


Figure 4a (i)

(ii)

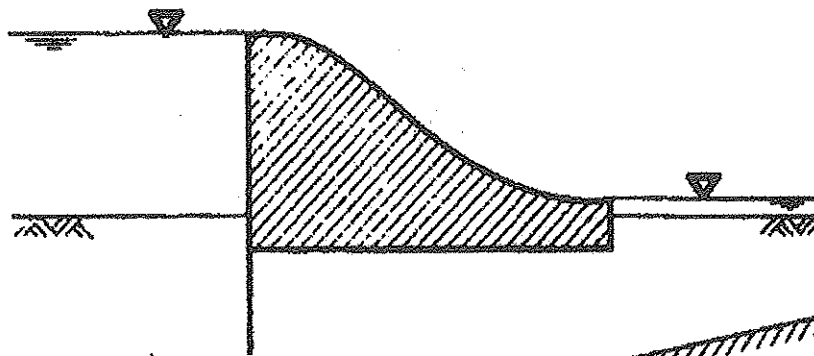


Figure 4a (ii)

[15 marks]

[15 markah]

CLO2
C4

- (b) The cross-section of a homogeneous earth dam is shown in **Figure 4 (b)**. The coefficient of permeability is 4.5×10^{-6} m/s. Sketch a flow net and evaluate the quantity of seepage in m^3/day per meter run with the toe filter as shown in **Figure 4 (b)**.

Satu keratan rentas empangan tanah homogen ditunjukkan di dalam Rajah 4 (b). Pekali kebolehtelapan ialah 4.5×10^{-6} m/s. Lakarkan jaringan aliran dan nilaikan kuantiti resipan dalam unit m^3/hari per meter serta terdapatnya penapis dibahagian hujung empangan seperti yang ditunjukkan dalam Rajah 4 (b).

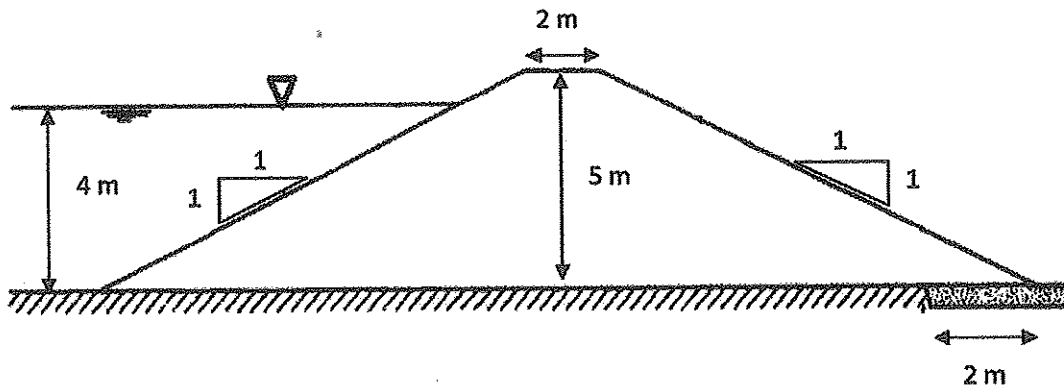


Figure 4 (b) / Rajah 4 (b)

[10 marks]

[10 markah]

SOALAN TAMAT

LAMPIRAN FORMULA (DCC3103 – GEOTECHNICAL ENGINEERING)

$$Q = k H \frac{N_f}{N_e}$$

$$FOS = \frac{CR^2\theta}{Wd}$$

$$l = \frac{\Delta h}{\Delta s}$$

$$FOS = \frac{C_A R^2 \theta_A + C_B R^2 \theta_B}{Wd}$$

$$u_x = u_w \left(\frac{N_x}{N_e} \cdot \Delta H - (-Z_x) \right)$$

$$P = \frac{Rv}{B} \left(1 \pm \frac{6e}{B} \right)$$

$$K_a = \frac{1 - \sin \phi}{1 + \sin \phi}$$

$$FOS = \frac{Rv \tan \delta}{RH}$$

$$K_p = \frac{1 + \sin \phi}{1 - \sin \phi}$$

$$e = B/2 - \bar{X}$$

$$\rho_b = \frac{M_T}{V_T}$$

$$FOS = \frac{\mu R}{\mu T}$$

$$PI = LL - PL$$

$$Q = kH \frac{N_f}{N_e}$$

$$LI = \frac{w - PL}{PI}$$

$$u_x = \gamma_w [h_x - (-Z_x)]$$

$$FOS = \frac{Cu}{N\gamma Z}$$

$$Z_c = \frac{2C}{\gamma} \sqrt{\frac{1}{Ka}}$$

$$FOS = \frac{\sum CL' + w \cos \alpha \tan \phi}{\sum w \sin \alpha}$$

$$\sigma_a = ka [\gamma z + q] - 2C\sqrt{Ka}$$

$$FOS = \frac{\sum CL' (W \cos \alpha - \mu L')}{\sum W \sin \alpha}$$

$$Z_c = \frac{2C}{\gamma} \sqrt{\frac{1}{Ka}}$$

$$FOS = \frac{CR^2\theta'}{Wd + Pw\gamma c}$$

$$G_s = \frac{M_s}{V_s \rho_w}$$

Correction Table $\frac{\Delta a}{a + \Delta a}$ Earth Dam (Non Filter)

$$\rho_a = \frac{\rho_b}{1 + w}$$

Slope,	30	60	90	120	150	180
--------	----	----	----	-----	-----	-----

$$e = \frac{n}{1 - n}$$

α						
$\frac{\Delta a}{a + \Delta a}$	0.37	0.32	0.25	0.18	0.10	0

STRIP FOUNDATION

$$q_u = c_u N_c + \gamma DNq + 0.5 \gamma BN_\gamma$$

CIRCLE FOUNDATION

$$q_u = 1.3c_u N_c + \gamma DNq + 0.3 \gamma BN_\gamma$$


SQUARE SPREAD FOUNDATION

$$q_u = 1.3c_u N_c + \gamma DNq + 0.4 \gamma BN_\gamma$$

RECTANGLE SPERAD FOUNDATION

$$q_u = c_u N_c [1 + 0.3 (B/L) + \gamma DNq + 0.5 \gamma BN_\gamma [1 - 0.2 (B/L)]$$

Taylor Stabilization Chart

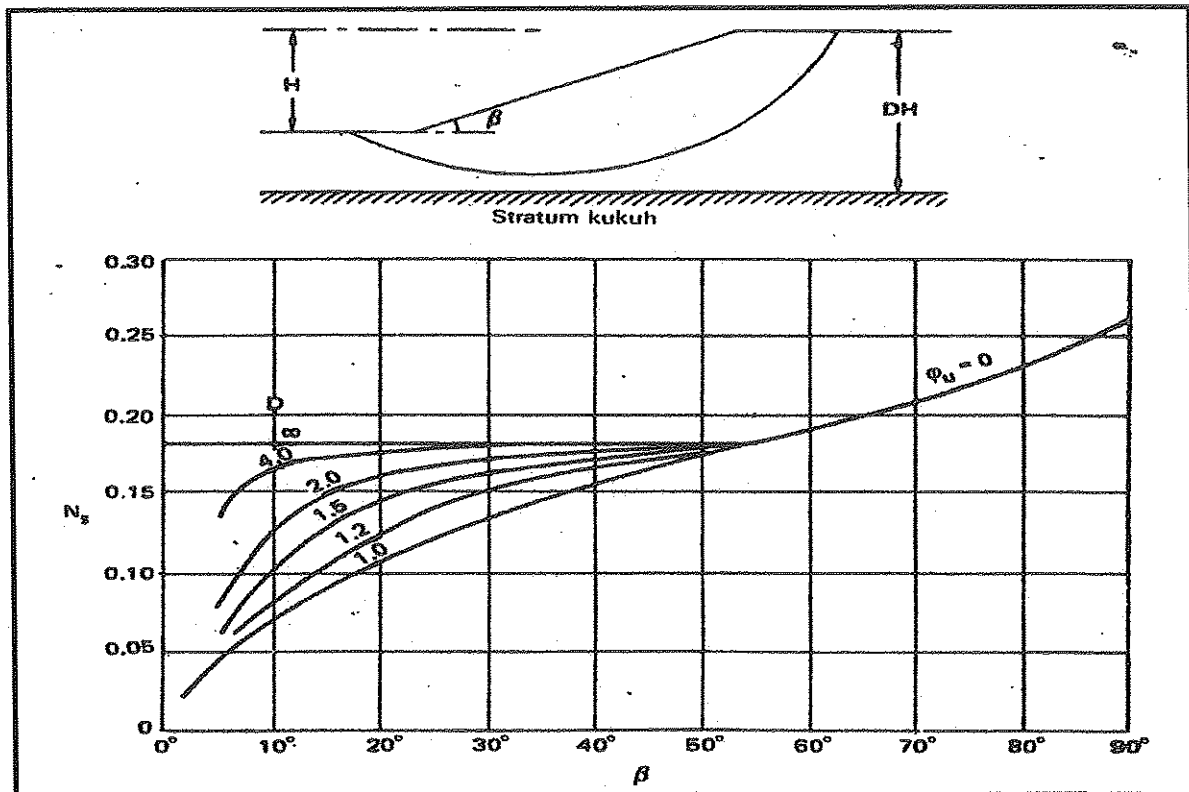



GERAF SEMI LOG (JKA)

PARTICLE SIZE DISTRIBUTION			
Job No.	Project	BHP/It no.	Date
Site	Client	Sample no.	Tested by
Test method	Soil Descrip	Depth (m)	Checked by

British Standard Sieves, (mm)	particle diameter, (mm)																				
	0.003	0.006	0.01	0.02	0.06	0.1	0.2	0.425	0.6	1	2	3.75	5	6.3	10	14	20	30	47.5	75	
Percentage Passing (%)																					

CLAY	SILT	SAND	GRAVEL
fine medium coarse	fine medium coarse	fine medium coarse	fine medium coarse

GRADING CHARACTERISTICS	
% Gravel	
% Sand	
% Silt	
% Clay	
D ₉₀ (mm)	
D ₆₅ (mm)	
D ₅₀ (mm)	
D ₃₀ (mm)	
D ₁₅ (mm)	
D ₁₀ (mm)	
C _u	
C _g	
Soil Classification	
Remarks :	

UNIFIED SOIL CLASSIFICATION INCLUDING IDENTIFICATION AND DESCRIPTION									
FIELD IDENTIFICATION PROCEDURES (excluding passes larger than 3 inches and testing fractions on estimated weights)			GROUP SYMBOLS		TYPICAL NAMES		INFORMATION REQUIRED FOR DESCRIBING SOILS		
<p>COARSE GRAINED SOILS More than half material is smaller than No. 200 sieve size (The No. 200 sieve size is about the smallest particle visible to the naked eye)</p>	<p>GRAVELS More than 75% of coarse fraction is larger than No. 4 sieve size (For visual classification the No. 4 sieve size is equivalent for the No. 4 sieve size)</p>	<p>CLAYEY SANDS (less than 50% sand) More than 50% sand (with fines)</p>	<p>GW</p>	<p>Well graded gravels, gravel-sand mixtures, little or no fines</p>	<p>Give typical name; indicate approximate percentage of sand and gravel, max. size, angularity, surface condition, and hardness of the coarse grains, local or geological name and other pertinent descriptive information, and symbol in parentheses</p>	<p>Greater than 4</p>	<p>$C_u = \frac{D_{60}}{D_{10}}$ $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$</p>	<p>LABORATORY CLASSIFICATION CRITERIA</p>	<p>Use grain size curve in identifying the fractions as given under text identification</p>
<p>FINE GRAINED SOILS More than half material is smaller than No. 200 sieve size (The No. 200 sieve size is about the smallest particle visible to the naked eye)</p>	<p>SANDS WITH FINES (more than 12.5% sand) More than 12.5% sand (with fines)</p>	<p>CLAYEY SILTS (less than 50% silt) More than 50% silt (with fines)</p>	<p>SW</p>	<p>Well graded sands, gravelly sands, little or no fines</p>	<p>EXAMPLE Silty sand gravelly, about 20% hard, singular gravel parallel to - in maximum size; rounded and subangular sand grains coarse to fine; about 15% non-plastic fines with low dry strength; well compacted and moist in place; alluvial sand; (SM)</p>	<p>Greater than 6</p>	<p>$C_u = \frac{D_{60}}{D_{10}}$ $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$</p>	<p>LABORATORY CLASSIFICATION CRITERIA</p>	<p>Use grain size curve in identifying the fractions as given under text identification</p>
<p>PINE GRAINED SOILS More than half material is smaller than No. 200 sieve size (The No. 200 sieve size is about the smallest particle visible to the naked eye)</p>	<p>SILTS AND CLAYS Liquid limit less than 50</p>	<p>CLAYEY SILTS (less than 50% silt) More than 50% silt (with fines)</p>	<p>ML</p>	<p>Inorganic silts and very fine sands, rock flour, silty or clayey fine sand with slight plasticity</p>	<p>Give typical name; indicate degree and character of plasticity, amount and maximum size of coarse grains, color in wet condition, odor, if any, local or geologic name, and other pertinent descriptive information, and symbol in parentheses</p>	<p>Greater than 4 and 7 are borderline cases requiring use of dual symbols</p>	<p>LABORATORY CLASSIFICATION CRITERIA</p>	<p>Use grain size curve in identifying the fractions as given under text identification</p>	<p>PLASTICITY CHART FOR LABORATORY CLASSIFICATION OF FINE GRAINED SOILS</p>
<p>HIGHLY ORGANIC SOILS Readily identified by color, odor, springy feel and frequently by fibrous texture</p>	<p>CLAYEY SILTS (less than 50% silt) More than 50% silt (with fines)</p>	<p>CLAYEY SILTS (less than 50% silt) More than 50% silt (with fines)</p>	<p>MH</p>	<p>Organic silts and organic silts-clays of low plasticity</p>	<p>EXAMPLE: Clayey silt, brown, slightly plastic, small percentage of fine sand, numerous vertical root holes; firm and dry in place; (MH)</p>	<p>Greater than 4 and 7 are borderline cases requiring use of dual symbols</p>	<p>LABORATORY CLASSIFICATION CRITERIA</p>	<p>Use grain size curve in identifying the fractions as given under text identification</p>	<p>PLASTICITY CHART FOR LABORATORY CLASSIFICATION OF FINE GRAINED SOILS</p>

BEARING CAPACITY FACTORS FOR GENERAL SHEAR

BEARING CAPACITY FACTORS FOR GENERAL SHEAR

ANGLE OF FRICTION ϕ (DEGREES)	TERZAGHI			Meyerhof			Hansen		
	N_c	N_q	N_{γ}	N_c	N_q	N_{γ}	N_c	N_q	N_{γ}
0	5.70	1.00	0.00	5.10	1.00	0.00	5.10	1.00	0.00
2	6.30	1.22	0.16	5.63	1.20	0.01	5.63	1.20	0.01
4	6.97	1.49	0.36	6.19	1.43	0.04	6.19	1.43	0.05
5	7.34	1.64	0.50	6.49	1.57	0.07	6.49	1.57	0.07
6	7.73	1.81	0.62	6.81	1.72	0.11	6.81	1.72	0.11
8	8.50	2.21	0.91	7.53	2.06	0.21	7.53	2.06	0.22
10	9.60	2.69	1.21	8.34	2.47	0.37	8.34	2.47	0.39
12	10.76	3.29	1.70	9.28	2.97	0.60	9.28	2.97	0.63
14	12.11	4.02	2.23	10.37	3.59	0.92	10.37	3.59	0.97
15	12.86	4.45	2.50	10.98	3.94	1.13	10.98	3.94	1.18
16	13.68	4.92	2.94	11.63	4.34	1.37	11.63	4.34	1.43
18	15.52	6.04	3.97	13.10	5.26	2.00	13.10	5.26	2.08
20	17.69	7.44	4.97	14.83	6.40	2.87	14.83	6.40	2.95
22	20.27	9.19	6.61	16.88	7.82	4.07	16.88	7.82	4.13
24	23.36	11.40	8.58	19.32	9.60	5.72	19.32	9.60	5.75
25	25.13	12.72	9.70	20.72	10.66	6.77	20.72	10.66	6.76
26	27.09	14.21	11.35	22.25	11.85	8.00	22.25	11.85	7.94
28	31.61	17.81	15.15	25.80	14.72	11.19	25.80	14.72	10.94
30	37.16	22.46	19.73	30.14	18.40	15.57	30.14	18.40	15.07
32	44.04	28.52	27.49	35.49	23.16	22.02	35.49	23.16	20.79
34	52.64	36.50	36.96	42.16	29.44	31.15	42.16	29.44	28.77
35	57.75	41.44	42.40	46.12	33.30	37.15	46.12	33.30	33.92
36	63.53	47.16	51.70	50.59	37.75	44.43	50.59	37.75	40.05
38	77.50	61.55	73.47	61.35	48.93	64.07	61.35	48.93	56.17
40	95.66	81.27	100.39	75.31	64.20	93.59	75.31	64.20	79.54
42	119.67	109.75	165.69	93.71	85.37	139.32	93.71	85.37	113.96
44	151.95	147.74	248.29	118.37	115.31	211.41	118.37	115.31	165.53
45	172.29	173.29	294.50	133.87	134.87	262.74	133.87	134.87	200.81
46	196.22	204.19	426.96	152.10	158.50	323.73	152.10	158.50	244.65
48	258.29	287.85	742.61	193.26	222.30	526.45	193.26	222.30	368.67
50	347.51	415.15	1153.15	266.88	319.06	873.86	266.88	319.06	568.57